



## 78L05 Three-terminal positive voltage regulator

### FEATURES

- Maximum output current  
 $I_{OM}: 0.1A$
- Output voltage  
 $V_O: 5V$
- Continuous total dissipation  
 $P_D: 0.625 W (T_a = 25 ^\circ C)$

TO-92

- 1. OUT
- 2. GND
- 3. IN



### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	30	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	160	$^\circ C/W$
Operating Junction Temperature Range	$T_{OPR}$	-40~+125	$^\circ C$
Storage Temperature Range	$T_{STG}$	-65~+150	$^\circ C$

# ELECTRICAL CHARACTERISTICS


$T_a=25^\circ\text{C}$  unless otherwise specified

( $V_i=10\text{V}$ ,  $I_o=40\text{mA}$ ,  $C_i=0.33\mu\text{F}$ ,  $C_o=0.1\mu\text{F}$ , unless otherwise specified )

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	$V_o$		25°C	4.80	5.0	5.20	V
				4.85	5.0	5.15	V
		7V ≤ $V_i$ ≤ 20V, $I_o=1\text{mA} \sim 40\text{mA}$ $I_o=1\text{mA} \sim 70\text{mA}$	0-125°C	4.90	5.0	5.10	V
				4.75	5.0	5.25	V
Load Regulation	$\Delta V_o$	$I_o=1\text{mA} \sim 100\text{mA}$	25°C		15	60	mV
		$I_o=1\text{mA} \sim 40\text{mA}$	25°C		8	30	mV
Line regulation	$\Delta V_o$	7V ≤ $V_i$ ≤ 20V			32	150	mV
		8V ≤ $V_i$ ≤ 20V	25°C		26	100	mV
Quiescent Current	$I_q$		25°C		3.8	6	mA
Quiescent Current Change	$\Delta I_q$	8V ≤ $V_i$ ≤ 20V	0-125°C			1.5	mA
	$\Delta I_q$	1mA ≤ $I_i$ ≤ 40mA	0-125°C			0.1	mA
Output Noise Voltage	$V_N$	10Hz ≤ $f$ ≤ 100KHz	25°C		42		μV/ $V_o$
Ripple Rejection	RR	8V ≤ $V_i$ ≤ 20V, $f=120\text{Hz}$	0-125°C	41	49		dB
Dropout Voltage	$V_d$		25°C		1.7		V

\* Pulse test.

## TYPICAL APPLICATION

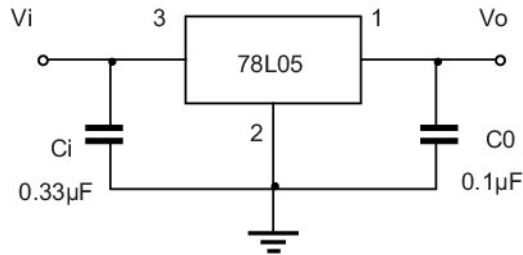

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# Typical Characteristics

